

profi-air® pipe systems

profi-air® iso pipe




profi-air iso coupling

Completely insulated and vapour-tight EPP coupling featuring thermal conductivity group 037. profi-air iso couplings are suitable for fresh, exhaust, supply and extract air.

- Permissible operating temperature: -25 to 80 °C

Cat. no.	Description	D ₁ [mm]	D ₂ [mm]	D ₃ [mm]	L [mm]	Weight [kg]	PU [pcs]
78312110	DN 125	125	155	185	80	0.10	6
78316110	DN 160	160	190	220	80	0.14	6
78318110	DN 180	180	210	240	80	0.15	6

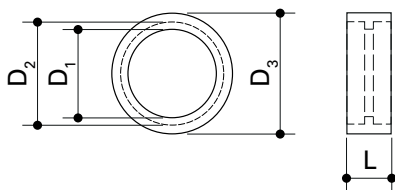

profi-air iso reducer

Completely insulated and vapour-tight EPP reducer featuring thermal conductivity group 037 to connect profi-air iso pipes and fittings. profi-air iso reducers are suitable for fresh, exhaust, supply and extract air.

- Permissible operating temperature: -25 to 80 °C

Cat. no.	Description	D ₁ [mm]	D ₂ [mm]	D ₃ [mm]	D ₄ [mm]	L ₁ [mm]	Weight [kg]	PU [pcs]
78312120	DN 160 / DN 125	190	160	155	125	170	0.08	2
78316120	DN 180 / DN 160	210	180	160	190	200	0.11	2

